


WORLD LEADER
IN CONTINUOUS ANODISING



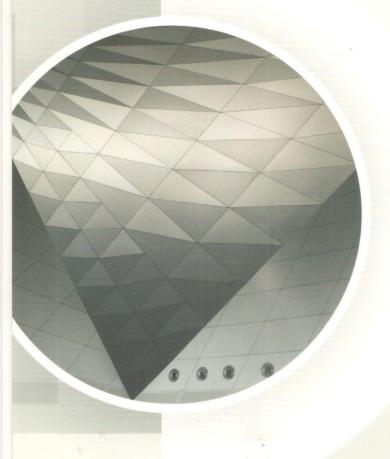

PRODUCTS

C-Bond

C-Brite

C-Brush

C-Deco

C-Flex

C-Iconic

C-Wall

C-Tech



All colours are usable for all our products.

All products and colours are also available in perforated pattern.

Install panels in the same direction to avoid orientation differences.

Order project in one batch to avoid colour differences.

Order project in one batch to avoid colour differences.



Standard Mill Finish





Brite





Brush







ALUMINIUM ALLOYS USED 1000, 3000, 5000 and 6000-series CONTINUOUS ANODISING

Coil Width	1000mm - 2000 mm (39.40" - 78.80")
Metal Thickness	0,3mm - 3,50mm (0.012" to 0.138")
Anodic Layer Thickness	Less than 1µm - 25µm (0.000039" - 0.001"
Coil Weight	Maximum 6,000 kg (13,224 lbs) to
	10,000 kg (22, 040 lbs) per line specification

ISO certified in quality management ISO 9001 ISO certified in quality management ISO 50001 ISO certified in quality management ISO 14001

Coil NV/S.A. Roosveld 5 B-3400 Landen BELGIUM Coil GmbH Claude-Breda-Straße 1 D-06406 Bernburg / Saale GERMANY



architect.helpline.support@coil.be international.sales@coil.be

www.coil.be